

ProLine CO 3300 AND CO 3400 HYDRAULIC CABLE CUTTERS

- Weight: 22 lbs / 9.98 kg
- Length: 49 in. / 124.4 cm
- Working Pressure: 1500-2000 psi / 105-140 bar
 - Flow Rate: 3-6 gpm / 11-23 lpm
 - Connection: 3/8 NPT Female Swivel
 - System Type: Open Centre
 - Jaw Opening: 3/4 in. / 7.62/10.2 cm
 - Wire Ropes: No
 - Copper Cable: Up to 2" / 50mm OD
 - Aluminum Cable: Up to 3" / 75mm OD
 - Telecommunication Cable: Up to 4" / 100mm



Fully trained operators should only use these hydraulic cutters. The cutters are fitted with “two handed” safety levers, that requires the operator to have BOTH hands on the cutter to operate them.

Operators should always wear protective eyewear and gloves and any other PPE equipment that may be required or necessary.

DO NOT operate in close proximity to other persons.

DO NOT operate when danger of live power cables exist.


DO NOT cut any material OTHER than that for which the tool was designed.

DO NOT hold the tool in front of the forward handgrip.

Disconnect hydraulic power supply when not in use, when adjusting or maintaining the cutters. Do not connect the cutters until you are ready to use them.

KEEP HANDS AND FEET AWAY FROM CUTTING BLADES.

These cutters are manufactured to close tolerances and require clean, high quality hydraulic oil. It is essential to clean couplings with a clean cloth prior to attaching to the power outlets, road dirt and grit will damage the internal seals of the cutters. If couplings leak, seek replacements as soon as possible and be aware of oil spillages.

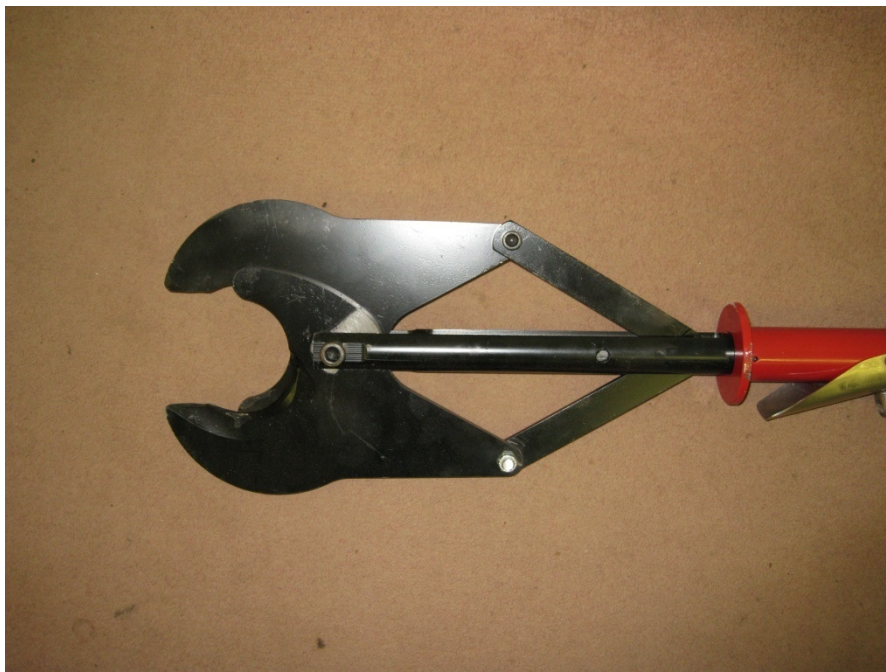

OPERATION

The cutters must have two hands on the controls to operate. Keep the cutters at right angles to the cable being cut, this helps prevent blade bending.

DO NOT twist or pry with cutting blades OR attempt to cut steel or material other than those the cutter was designed.

IMPORTANT The performance of the cutter is greatly affected by maintaining sharp cutting edges and correct blade pivot bolt tightness. Maintain regularly.

WARNING: Only use genuine replacement parts for your cutters and skilled servicing; this will provide you with a safe and efficient cutter for years of hard work. Failure to follow the above can lead to serious injury or death.

WARNING: Do not attempt to override any safety devices fitted to these cutters. **DO NOT USE THE CUTTERS IF THEY ARE BROKEN OR DOES NOT WORK CORRECTLY, SEEK SERVICE HELP.**

UNDERGROUND SYSTEMS LIMITED

Country Work, Sunderland Road,

Sandy. Beds SG19 1RS.

Tel: 01767-691414. Fax: 01767-683914

www.undergroundsystems.com

info@undergroundsystems.com